

(Following Paper ID and Roll No. to be filled in your Answer Book)

PAPER ID : 3088

Roll No.

--	--	--	--	--	--	--	--	--	--

**B.Tech.**(SEM. V) ODD SEMESTER THEORY EXAMINATION  
2010-11**AUTOMATIC CONTROL SYSTEM**

Time : 3 Hours

Total Marks : 100

**Note** :- Attempt **all** questions. All questions carry equal marks.1. Attempt any **two** parts of the following : (10×2=20)

(a) (i) List the major advantages and disadvantages of open-loop control systems.

(ii) List the important properties of signal flow graphs.

Give the Mason's gain formula for signal flow graphs.

(b) Using the force-voltage analogy, obtain an electrical analog of the mechanical system of figure 1.

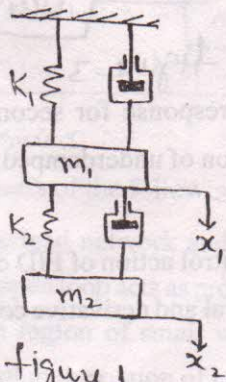


figure 1

1

- (c) Derive the transfer function of the electrical system shown in figure 2. Draw a schematic diagram of an equivalent mechanical system.

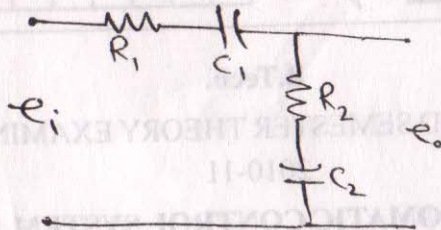


figure.2

2. Attempt any **two** parts of the following : **(10×2=20)**

- (a) Consider a system shown in figure 3. Find static position error constant  $k_p$ , and static velocity error constant  $k_v$ . Show that steady state activating error for unit-ramp input is zero for type 2 or higher systems.

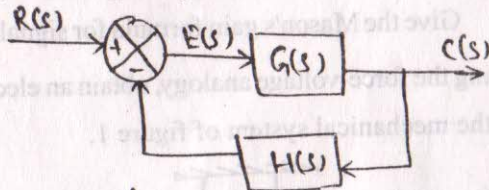


figure.3

- (b) Find the step response for second order system. Also discuss condition of underdamped, critically damped and overdamped.
- (c) Explain the control action of PID controller. Also discuss effects of integral and derivative control actions on system performance.

3. Attempt any **two** parts of the following : **(10×2=20)**

- (a) Sketch the root loci for the system of figure 4. The gain  $K$  is assumed to be positive. Show that for small or large values of  $K$  the system is overdamped and for medium values of  $K$  it is underdamped.

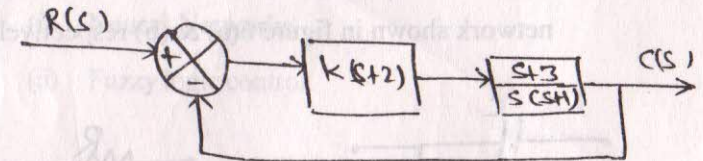


figure 4

- (b) Write notes on following :

- (i) Asymptotic and conditional stability
- (ii) Nyquist stability criterion
- (iii) Routh's stability criterion.

- (c) Using the inverse polar plot, determine the range of gain  $K$  for stability of control system shown in figure 5.

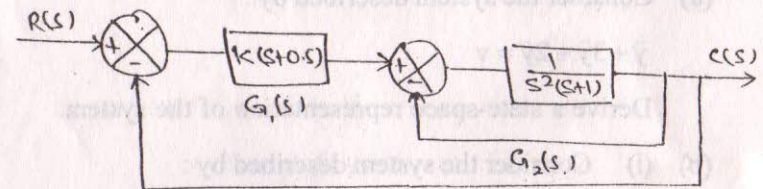


figure.5

4. Attempt any **two** parts of the following : **(10×2=20)**

- (a) Show that the lead network and lag network inserted in cascade in an open loop acts as proportional-plus-derivative control in the region of small  $\omega$  and proportional-plus-integral control in the region of large  $\omega$ , respectively.